Kebudur PU Repair
PRODUCT DATA SHEET

- Two-component polyurethane
- Solvent free
- For repairing and wrapping
- Short curing time
- Easy to process
- Excellent corrosion protection

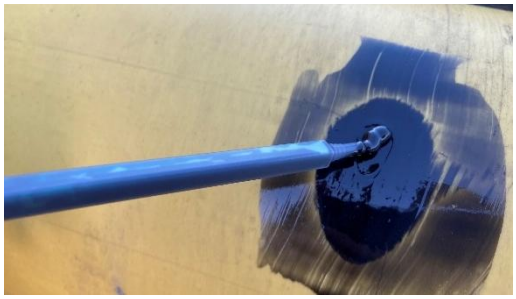

Kebudur PU Repair is a two-component polyurethane system for repairing defects and mechanical damage to PE and PP factory coatings, as well as for polyurethane coatings on fittings and pipelines.

Kebudur PU Repair is applied with a static mixer and applied with a spatula. It is characterized by a short curing time and easy processing. Kebudur PU Repair is suitable for coating pipes, pipe bends, fittings, welds, metallic surfaces at risk of corrosion. Furthermore, anodes can be glued on in cathodic corrosion protection. The consumption is approx. 1.24 kg/m2 at 1,000 µm layer thickness (theoretical value) without taking into account additional consumption.

FORMS OF DELIVERY

Product	Content
Kebudur PU Repair	50ml [62g] double cartridge in an aluminium bag with 2 mixing tubes

COMPLEMENTARY PRODUCT

Kebumix 62: Manual tool for the application of Kebudur PU Repair.

TECHNICAL PROPERTIES

Property	Unit	Typical values
Density	g/cm³	≈ 1,24
Mixing ratio	-	1:1
Colour	-	Graphit black (RAL 9011)
Recommended dry-film density	µm	⩾ 1500
Minimal reworking period	min	5
Operating temperature	°C	- 20 up to + 80
Processing time	sec	app. 50
Relative humidity	%	80

STORAGE

Store in cool, dry and frost-free place. Unopened containers can be stored 12 months.

The information given in this publication is based on our knowledge and experience. The hints and instructions for use given therein have been compiled to the best of our knowledge on the basis of our tests and experience. Best results will be obtained if our products are used in a proper and expert way. Any protected rights and existing laws and regulations must be complied with the recipient. In all other respects our general terms and conditions shall apply.
-- Rev.: 03_14.01.2025 --

Kebulin-Gesellschaft Kettler GmbH & Co. KG
Ostring 9 | D-45701 Herten-Westerholt
Tel. +49 209 9615-0 | Fax +49 209 9615-190 | info@kebu.de | www.kebu.de